



online: [mmsprayersusa.com](http://mmsprayersusa.com)

A DIVISION OF WaterTec


## Sprayer: **BG Trailer**

Available Models: **BG 600T, BG 800T, and BG 1000T**

The **BG Trailer** series is designed specifically for orchards, nurseries, and vineyards where low horse power and compact tractors are a necessity. The poly tank is constructed from the highest quality material, ensuring impact resistance, UV stabilization, and a long chemical-resistant life. The BG series use A.R. pumps and controls which guarantee low maintenance and cost effective parts. The BG Trailer is a must for the professional grower.

### *Core Features:*

- 164, 212, and 264 Gallon Poly Tank
- A.R. Diaphragm Pump
- VDR 50 Controller
- 28.5" Diameter Fan
- 12 Double Check Valve Nozzles
- Pressure Gauge and Control
- Recommended Tractor - 35 hp to 40 hp

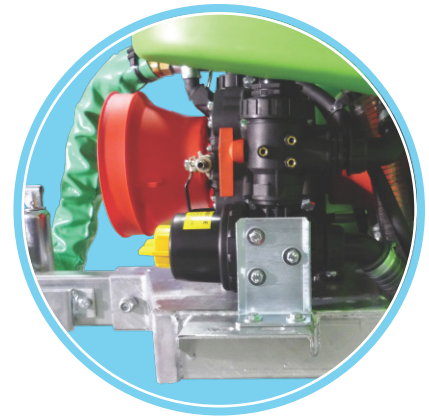

**Ackerman**



George F. Ackerman Company, Inc.

PO Box 157/300 Mill Street, Curtice, OH 43412

Phone: 419-836-7735/Fax: 419-836-2040/Email: [info@ackermantoledo.com](mailto:info@ackermantoledo.com)



online: [mmsprayersusa.com](http://mmsprayersusa.com)


A DIVISION OF WaterTec

# Sprayer: **BG Trailer**

Available Models:

**BG 600T, BG 800T, and BG 1000T**

|   | BG 600T                              | BG 800T                              | BG 1000T                             |
|---|--------------------------------------|--------------------------------------|--------------------------------------|
| Dry Weight  | 715 lbs                              | 815 lbs                              | 990 lbs                              |
| Length  | 108"                                 | 108"                                 | 119"                                 |
| Width   | 41"                                  | 41"                                  | 51"                                  |
| Height  | 48"                                  | 50"                                  | 54"                                  |
| Capacity  | 164 Gallons                          | 212 Gallons                          | 264 Gallons                          |
| <b>Pump</b>   |                                      |                                      |                                      |
| Model   | A.R. Diaphragm 1064                  | A.R. Diaphragm 1064                  | A.R. Diaphragm 1604                  |
| Power for Pump  | 13 hp                                | 13 hp                                | 13 hp                                |
| Controller  | VDR 50                               | VDR 50                               | VDR 50                               |
| Nozzle Type   | Teejet                               | Teejet                               | Teejet                               |
| Number of Nozzles   | 12                                   | 12                                   | 12                                   |
| Nozzle Body Type  | Braglia Double Nozzle w/ Check Valve | Braglia Double Nozzle w/ Check Valve | Braglia Double Nozzle w/ Check Valve |
| <b>Electric Control</b>   |                                      |                                      |                                      |
| Left/Right  | Optional                             | Optional                             | Optional                             |
| Agitation   | Hydro Venturi                        | Hydro Venturi                        | Hydro Venturi                        |
| <b>Fan</b>  |                                      |                                      |                                      |
| Diameter  | 28.5"                                | 28.5"                                | 28.5"                                |
| RPM   | 2100                                 | 2100                                 | 2100                                 |
| Air Volume  | 21,612 cfm                           | 21,612 cfm                           | 21,612 cfm                           |
| Power   | 35 hp                                | 35 hp                                | 35 hp                                |
| <b>Additional Equipment Specifications</b>                                      |                                      |                                      |                                      |
| PTO Speed   | 540 rpm                              | 540 rpm                              | 540 rpm                              |
| Max Power   | 28 hp                                | 28 hp                                | 28 hp                                |
| Recommended Tractor Size  | 35 hp                                | 40 hp                                | 40 hp                                |
| <b>Included Options</b>   |                                      |                                      |                                      |
| Venturi Chemical Fill<br>Galvanized Frame<br>Quick Attach Fittings<br>PTO Shaft |                                      |                                      |                                      |

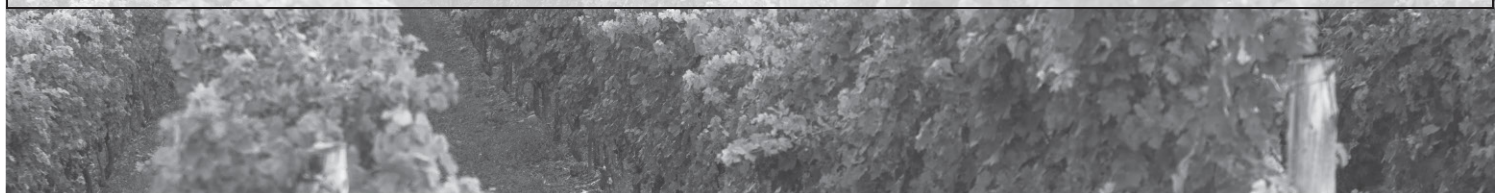

George F. Ackerman Company, Inc.  
 PO Box 157/300 Mill Street, Curtice, OH 43412  
 Phone: 419-836-7735/Fax: 419-836-2040/Email: [info@ackermantoledo.com](mailto:info@ackermantoledo.com)